


# FUJI ELECTRIC BRAND TOUCH SCREEN TYPE PET CAN VENDING MACHINE

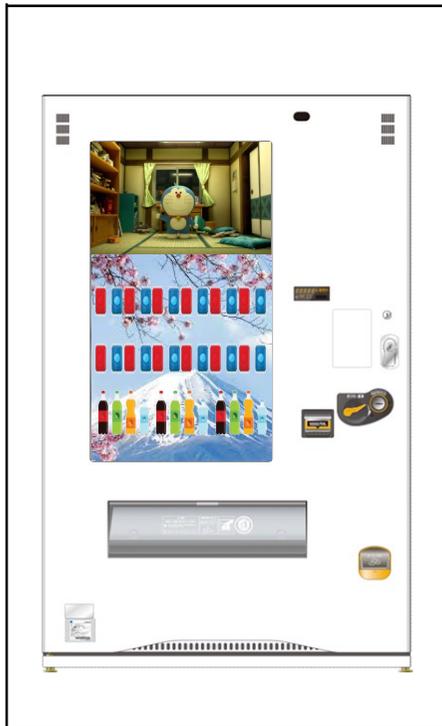

## TOUCH SCREEN SELECTION BUTTON

1	2	3	4	5	6	7	8	9	10	11	12
---	---	---	---	---	---	---	---	---	----	----	----

HOT						HOT					
COLD						COLD					

13	14	15	16	17	18	19	20	21	22	23	24
----	----	----	----	----	----	----	----	----	----	----	----

HOT						COLD					
COLD											

25	26	27	28	29	30	31	32	33	34	35	36
----	----	----	----	----	----	----	----	----	----	----	----

COLD											
COLD											

## COLUMN SECTION / HOT COLD SECTION

1	B	7	B	13	B	19	B	25	P	31	WP
---	---	---	---	----	---	----	---	----	---	----	----

2	B	8	B	14	B	20	B	26	P	32	WP
---	---	---	---	----	---	----	---	----	---	----	----

3	B	9	B	15	B	21	B	27	P	33	WP
---	---	---	---	----	---	----	---	----	---	----	----

4	B	10	B	16	B	22	B	28	P	34	WP
---	---	----	---	----	---	----	---	----	---	----	----

5	B	11	B	17	B	23	B	29	P	35	WP
---	---	----	---	----	---	----	---	----	---	----	----

6	B	12	B	18	B	24	B	30	P	36	WP
---	---	----	---	----	---	----	---	----	---	----	----

36COLD											
12HOT						24COLD					
12COLD				6HOT				18COLD			
18HOT						18COLD					

Name	6-layer serpentine HOT & COLD PET CAN vending machine (Touch Screen Display)
Model	FAE36M6RF807-VMWA
Dimension	Height1,830 × Width1,185 × Depth722mm
Weight	291 KG
Selection	Optical Touch Screen Panel 36 selections 36 push button screen
Commodity	160/190/250mLCAN 280/350/500mLCAN 100/120mLBottle 280/500mLPET 500mLWIDE • PET
Control Specification	Fuji Electric Standard Specification
Method	Thin 6-layer serpentine rack
Lighting (fluorescent)	None (Touch Screen Panel Model)
Coin & Bill Mechanism	Optional
Animation	Movie : MP4 file Picture : PNG and GIF file
Total Capacity	714(250mLCAN)、540(350mLCAN)、184(500mLSquarePET) (□60)、180(500mLRound PET) (φ68)、90(500mLWIDE • ROUND PET) (φ68).
POS Type	JVMA ONLINE POS Online Communication Equipment are not included. Harness for Communication Equipment are included.
Heating Unit	Hybrid Heat Pump (Refrigerant : R1234YF)
Power Consumption	379 / 379 W
Electric Heating	620 W
Power Supply	Single phase 100V±10V 50/60Hz
Outlet Capacity	15A
Classification	III
Storage Capacity	1,567 L
Power Consumption	1,500 kW·h (Annual)
Parts to be setup	Computer 3G Router (Specifications), Electronic Money Device (E-money Specification), At On-site location Router for Electronic Money Device (Router Specification)
Optional Parts	Dual Key, WIFI Router (Router Specification)
Separate Parts	Dedicated printer, Dedicated camera

Further detail contact : japantogollc@gmail.com

## Number of accommodated products

Product	Column No	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	Total	
250mL thin CAN		27	23	22	18	16	13	27	23	22	18	16	13	27	23	22	18	16	13	27	23	22	18	16	13	27	23	22	18	16	13	27	23	22	18	16	13	714	
350mL thick CAN		20	18	16	14	12	10	20	18	16	14	12	10	20	18	16	14	12	10	20	18	16	14	12	10	20	18	16	14	12	10	20	18	16	14	12	10	540	
500mL SquarePET φ60																											21	18	17	14	12	10	21	18	17	14	12	10	184
500mL RoundPET φ68																											20	18	16	14	12	10	20	18	16	14	12	10	180
500mL SquareWIDE PET φ60																																							92
500mL RoundWIDE PET φ68																																							90
100mL GlassBottle (φ46)						19	15						19	15						19	15																	204	
120mL GlassBottle (φ48.7)						18	14						18	14						18	14																	192	

\* The above specifications and design are subject to change for improvement.



JAPANTOGO LLC